

Installation Guide

No-Drill Blinds Headrail




The difficulty level of this installation is ranked at **Level 1. A piece of cake!**

If you have questions or get stuck, call our Customer Care Team at 888-257-1840, or email customer care@selectblinds.com

1. Preparing the No Drill Blinds Headrail


Pull the lever from below or push down on the mechanism from above to retract the tension boot (See Fig B).

Install the metal strips or padded adhesive tape on opposite sides of the window opening where you'll be installing the No-Drill Blinds Headrail. This is optional and only available on larger products.

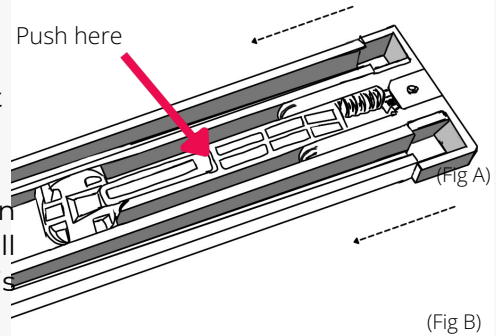


2. Installing the No Drill Blinds Headrail

Insert the No-Drill Blinds Headrail into the window opening, make it flush with the top of the window opening, then push on the lever to extend the tension spring and secure the No-Drill Blinds Headrail. (See Fig C)

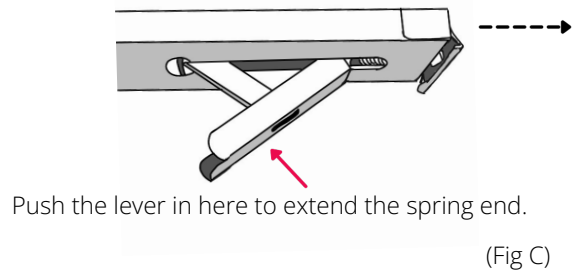

3. Installing the Product


Install the product onto the brackets (See Fig D). Test and operate the product to ensure secure installation and smooth functionality.

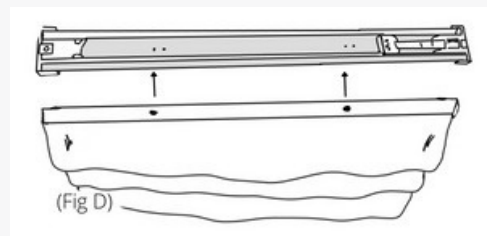

Uninstalling the No Drill Blinds Headrail


To uninstall the product, follow step 1 by removing the product from the headrail and use a screwdriver to unlatch the lever.

Make sure to hold the No Drill Blinds Headrail in place while unlatching the lever. This will prevent damage to the window or headrail.

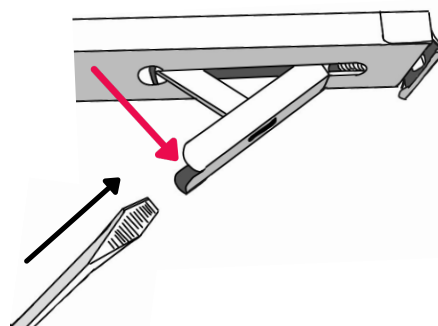

Tech Tip

If the fixed boot end was accidentally forced out, use a flathead screwdriver to twist the red "droplets" towards the center and then push it back in.

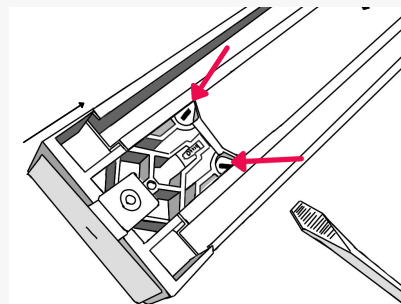


Installation Instructions - Cassette

Read the instructions carefully before assembling and using the product. Assembling process can be completed by non-professionals. For indoor use only.

WARNING





- Young children can strangle in the loop of pull cords, chains and tapes, and cords that operate window coverings.
- To avoid strangulation and entanglement, keep cords out of the reach of young children.
- Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.
- Do not tie cords together.
- Make sure cords do not twist together and form a loop.





QR



rtube.nl/red235

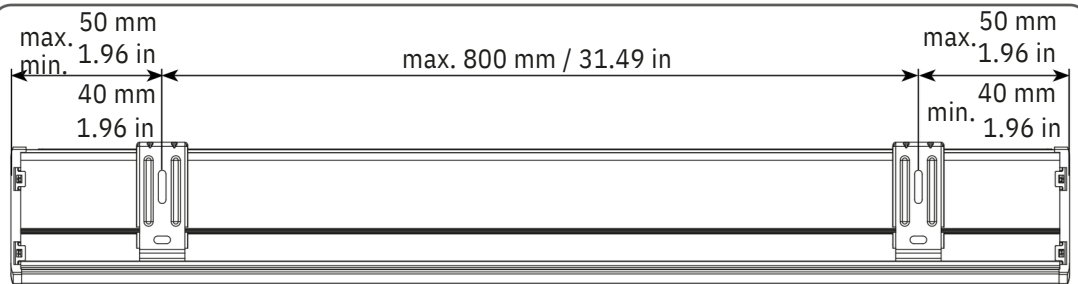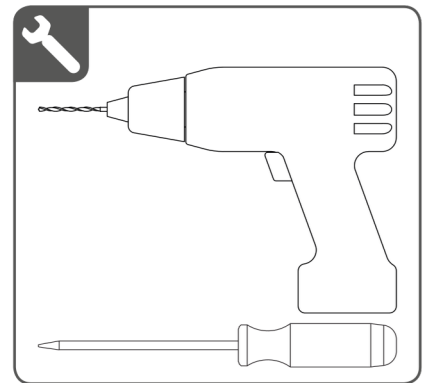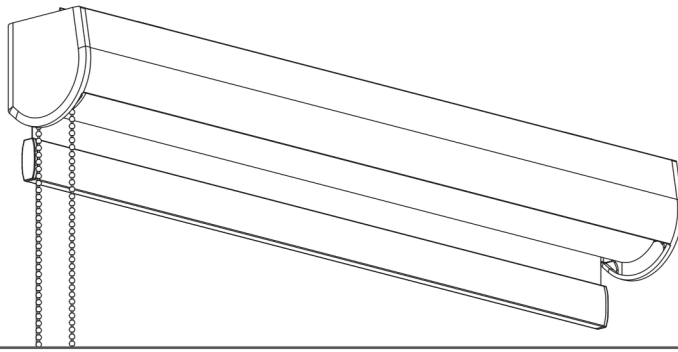

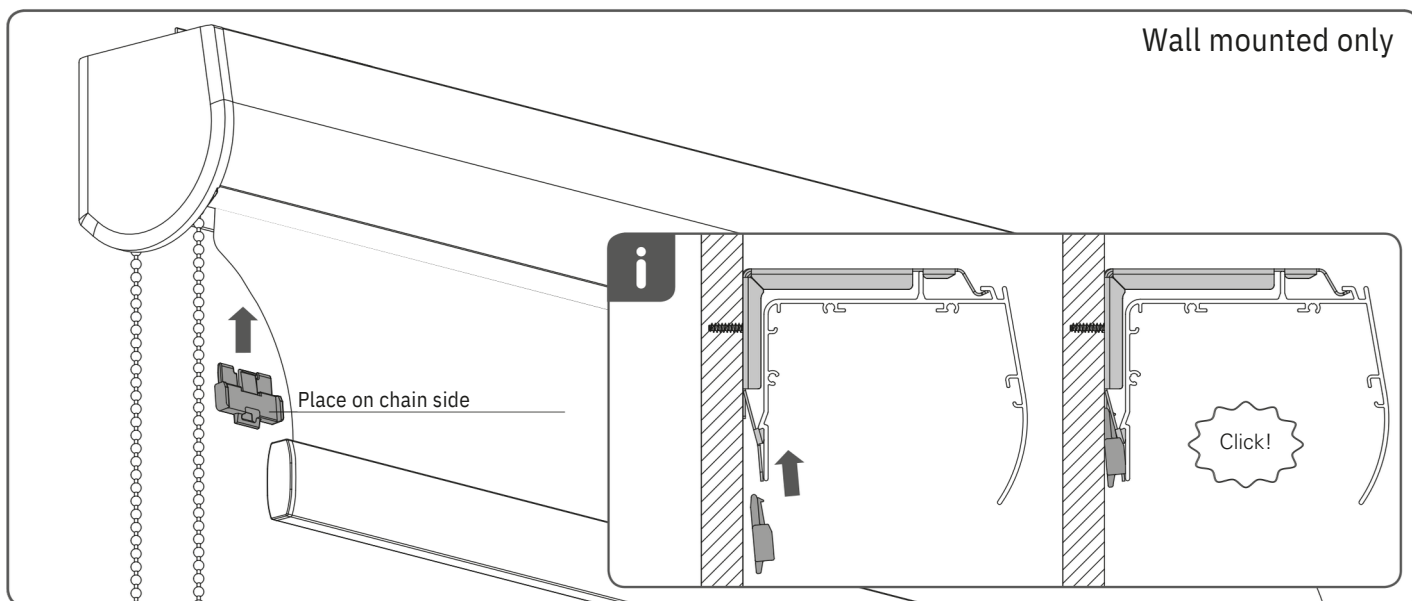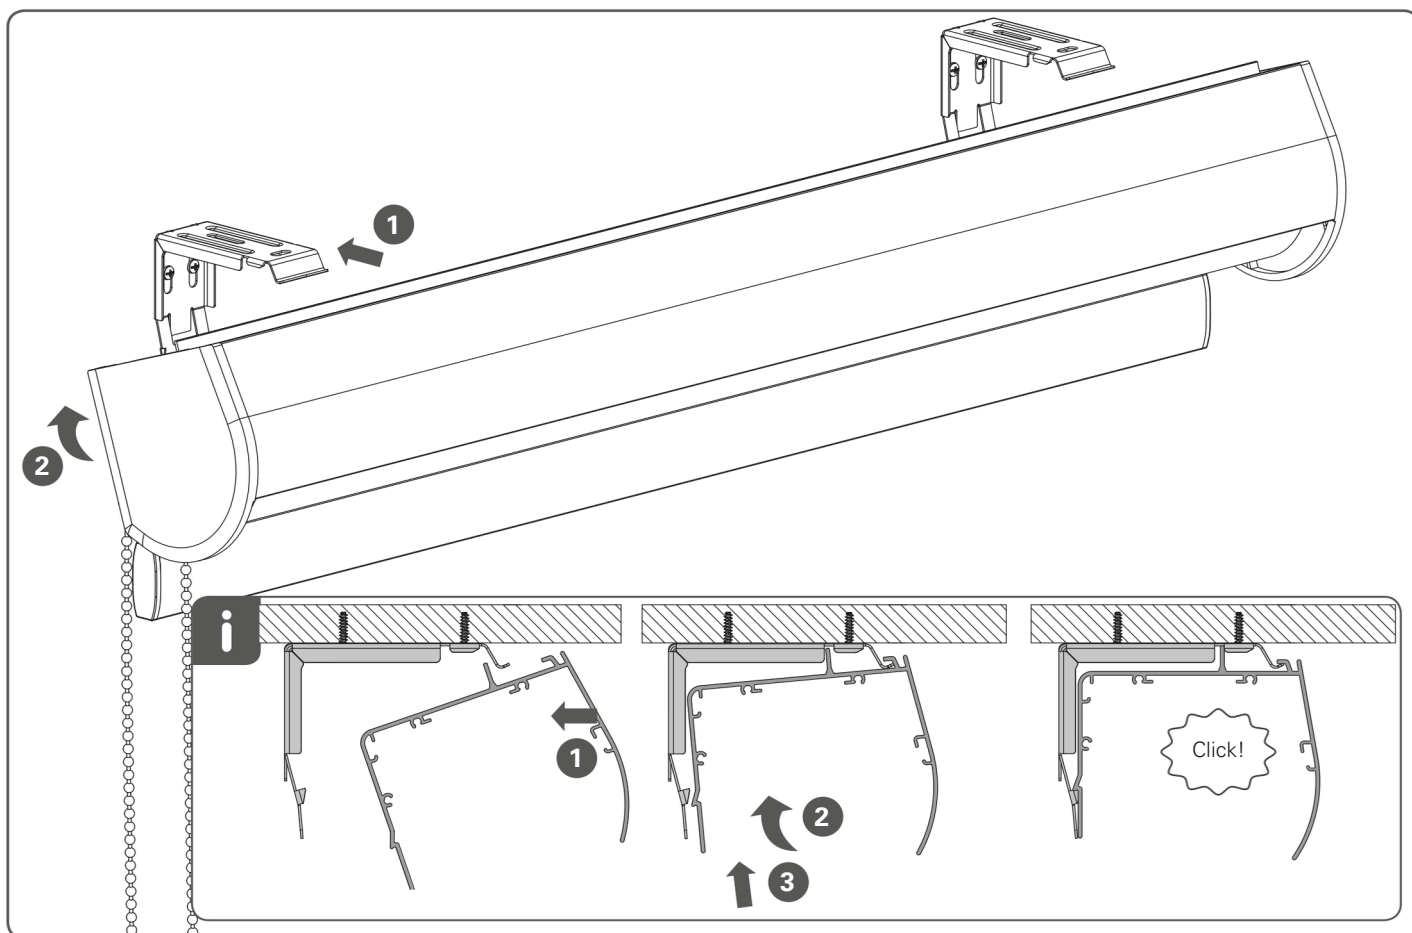


Wall mounted only

⚠ WARNING


Install the child safety device as specified in the childsafe manual.



Removal

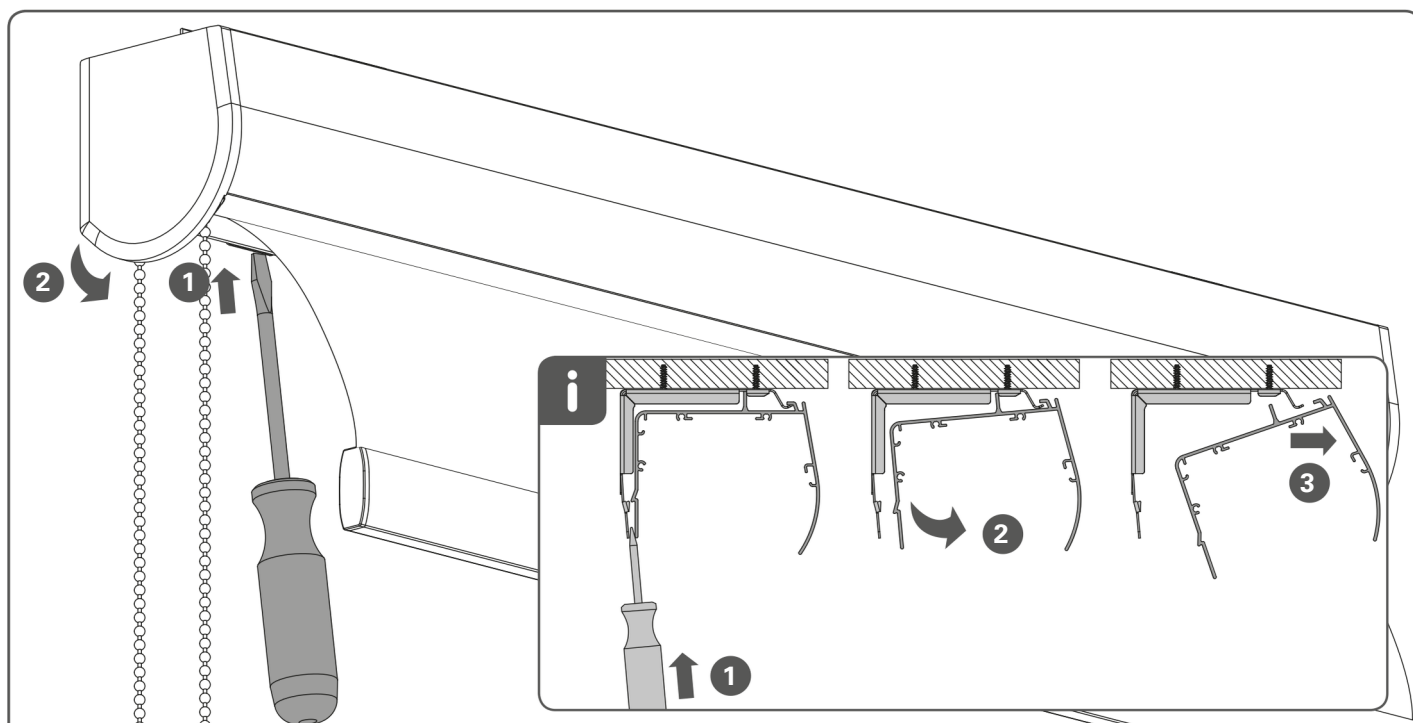

Only for wall mounting

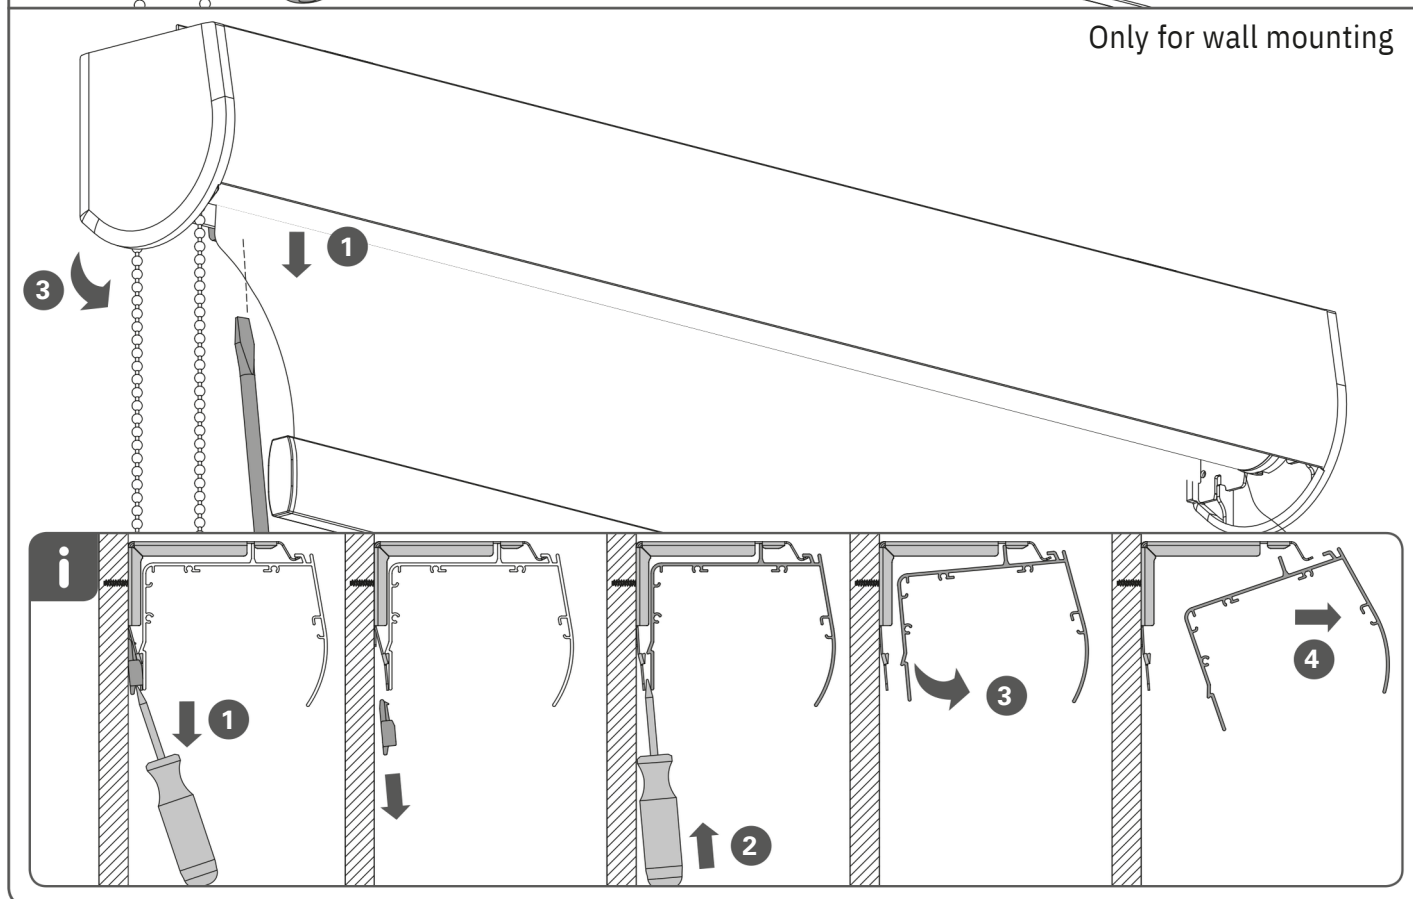


INSTALLATION INSTRUCTIONS - STANDARD BRACKETS

Installation

Read the instructions carefully before assembling and using the product.
Assembling process can be completed by non-professionals. For indoor use only.

WARNING




- Young children can strangle in the loop of pull cords, chains and tapes, and cords that operate window coverings.
- To avoid strangulation and entanglement, keep cords out of the reach of young children.
- Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.
- Do not tie cords together.
- Make sure cords do not twist together and form a loop.





QR




rtube.nl/red233

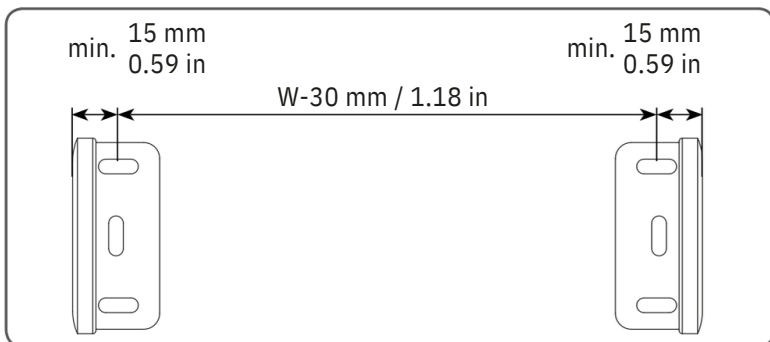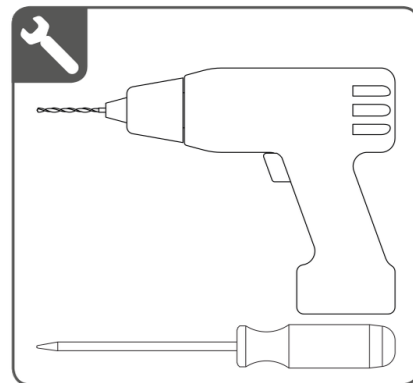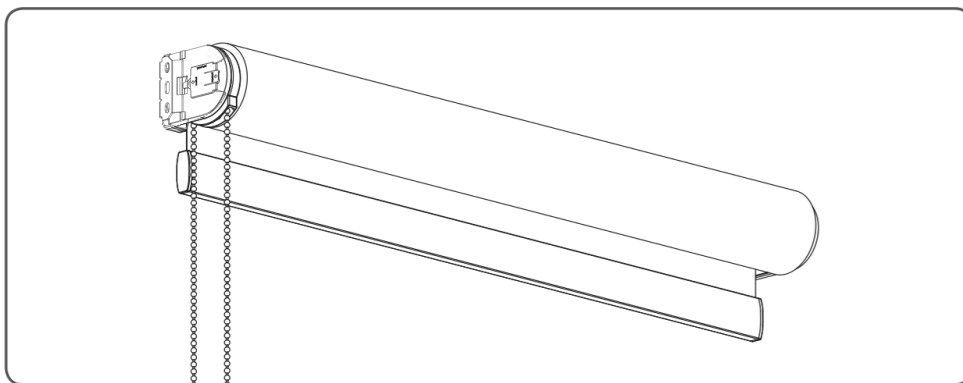

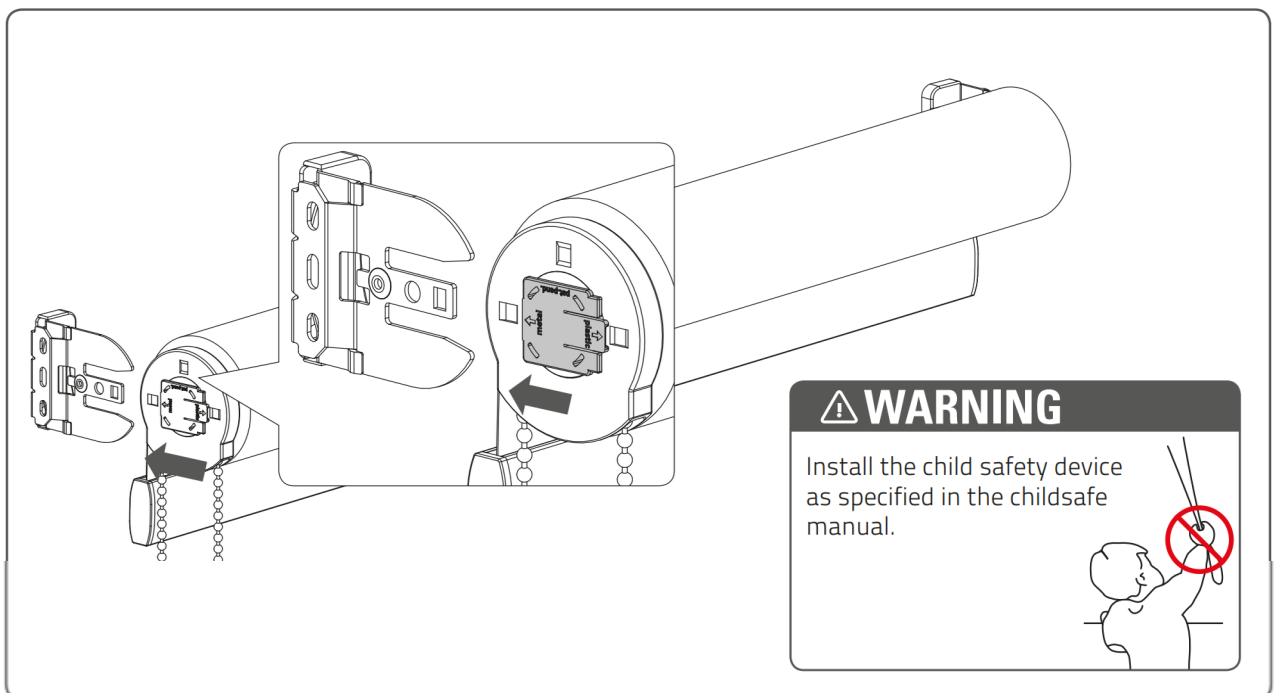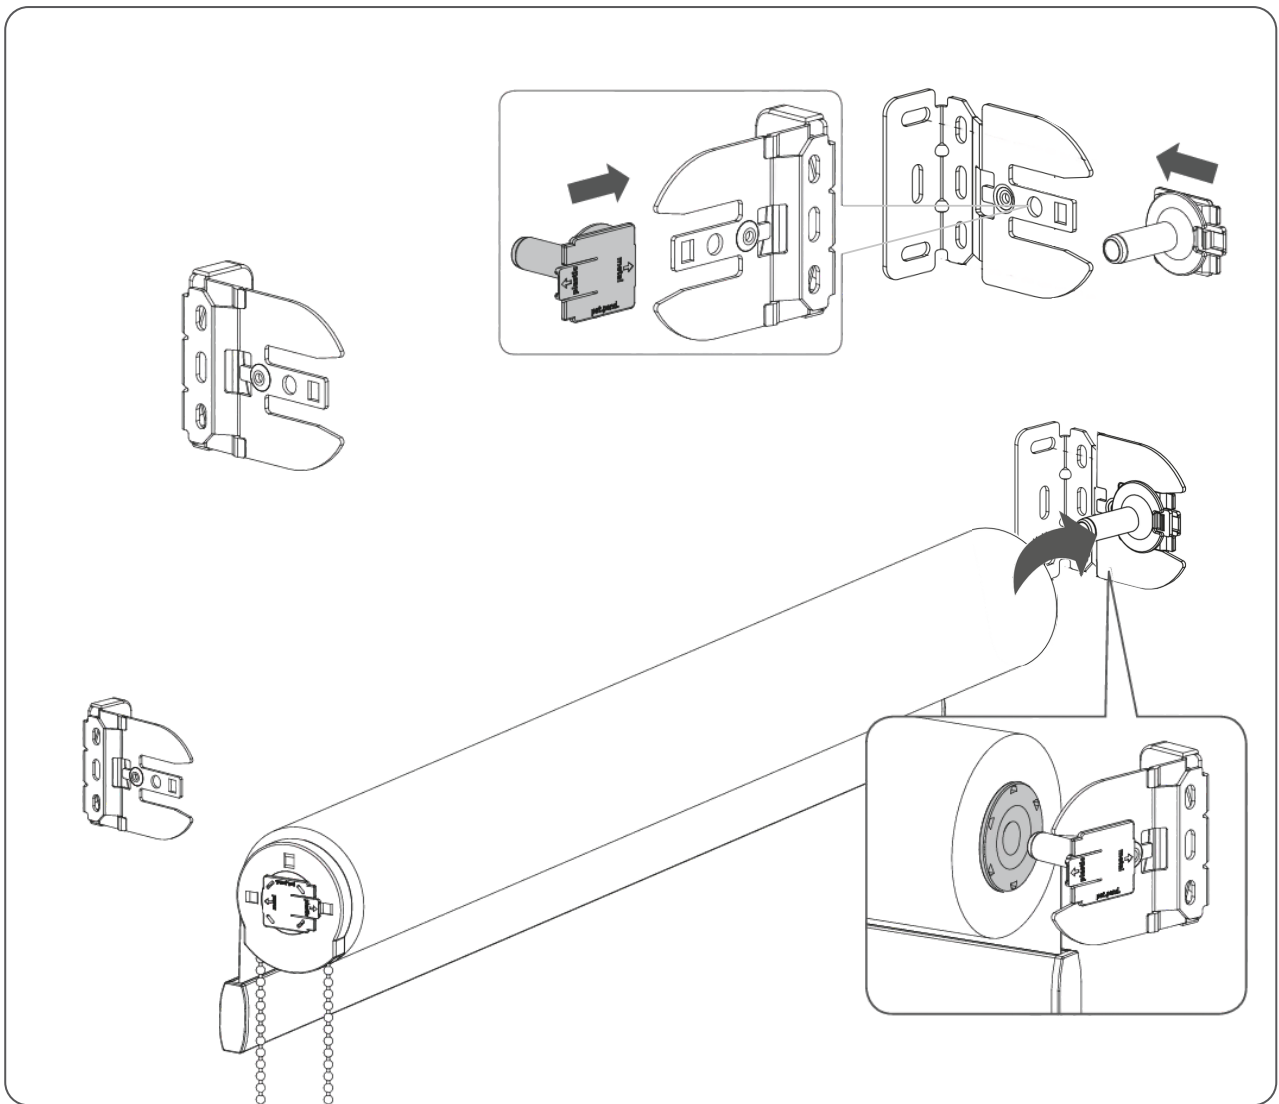


Removal


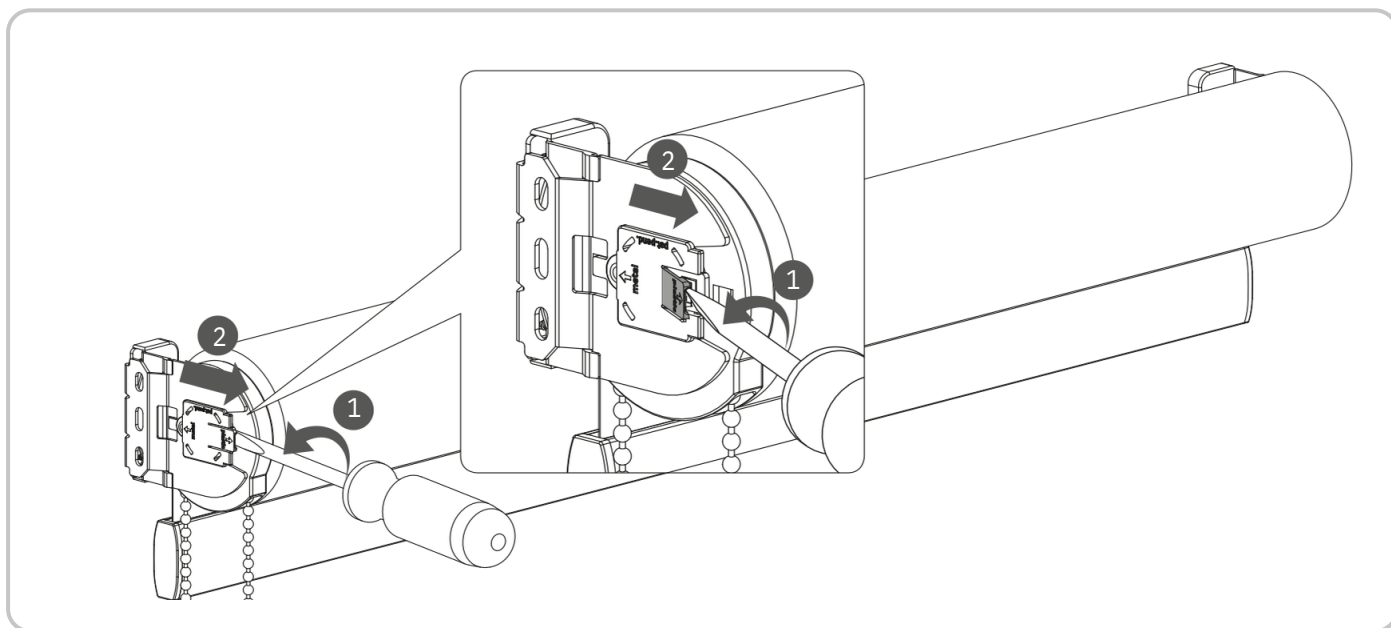


STANDARD AND LARGE CASSETTE HEADRAIL

1. Grab the cassette and hold it up to your brackets. Set the back edge of the headrail onto the bottom tab of each bracket. While in this position, you can slide the shade left or right until the cassette is centered. 2. When you're ready to secure the headrail, push the headrail back until the top of each bracket snaps onto the top of the cassette.

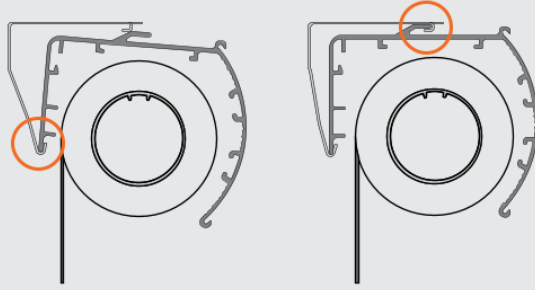

3. ADDITIONAL INSTRUCTIONS



WARNING!

The safety device must be applied on chain loops and prevents free-hanging loops in operating chains. Install the safety device at the maximum distance possible from the control mechanism to prevent slack in the loop.

